


Firmware Update Sticks

Multi Download Stick



Software Update from B2B 300/300XE Note Reader

The Software from the B2B 300/300XE note reader is updatable via memory stick. The number of possible transfers (shots) is dependent from the type of memory stick. The actual firmware contains the functions and the appropriate country currency of the Reader. In order to keep these configurations, you need the right memory stick.




	Unittyp	Hardware	Software
Part No.	MBB	5510	EU2116

MBB R = RoHS Konform

1. Information about the needed memory stick
We will inform you about the correct memory stick to update your units.
2. Order Process by S+M
Place your order accordantly to our given information as usual.

Process of the field Update


1. Remove the validating head
 - a) Power down (off) the validator
 - b) Lift the latch and pull out the Validator forward



2. Remove the dummy stick out of the card slot (if existing)



3. Slide the correct memory stick into the empty card slot.

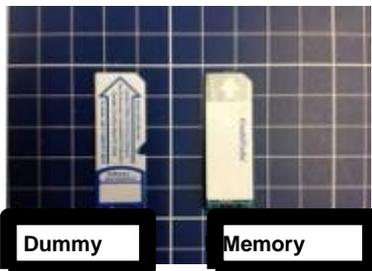

4. Validator reconnect with the housing (housing with cassette), make sure that it snaps into place.
5. Switch power ON
6. Wait while the indicator LED flashes green/red.
7. If the indicator LED lights steady red or green, the Update Prozess is completed.
8. Remove the validating head.
9. Remove the memory stick.
10. Stick a new label on the dummy stick to identify the new software.

11. Install the dummy stick.



12. Install the validating head and power on the validator (apply the power).

The Update process is completed.

Attention: After that rebuilt the unit and do some note acceptance tests. If you have used the wrong memory stick by mistake, please repeat the Steps 1) to 12) with the correct stick.