



Chassis Update Sticks

Multi Download Stick



Process of the field Update


1. Remove the validating head
 - a) Power down (off) the validator
 - b) Lift the latch and pull out the Validator forward




2. Remove the dummy stick out of the card slot (if existing)



3. Slide the chassis memory stick into the empty card slot.

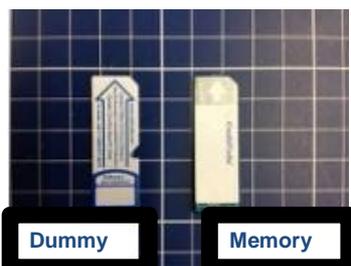

4. Set the B2B to SERVICE mode by turning the switch 2/4 ON (see picture).

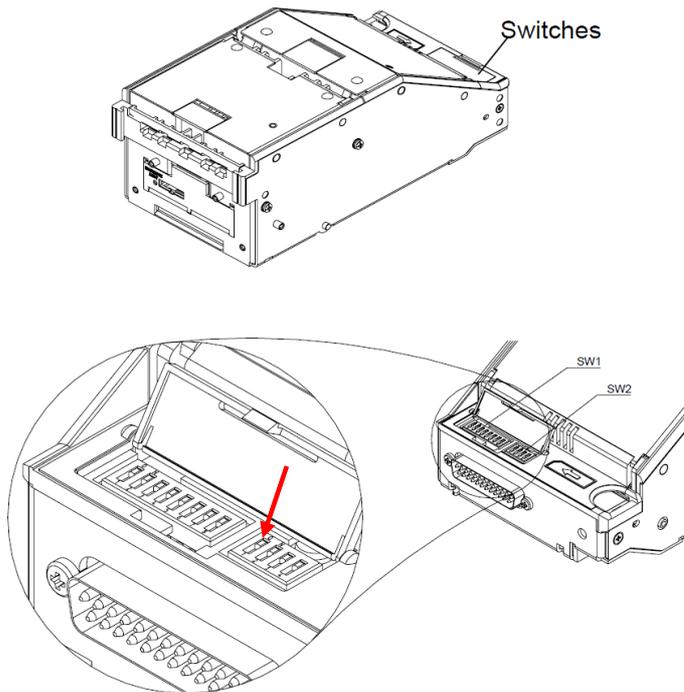

5. Slide the Validator head back into the B2B and turn the power ON.

6. Wait till the B2B is booting, this can take up to 2 minutes.

7. Remove the Validator head.

8. Remove the memory stick.

9. Install the dummy stick.



10. Set the B2B to Operation mode by turning the switch 2/4 OFF.

11. Slide the Validator back into the B2B and power on the validator.

The Update process is completed.